



## MS8392-EV

Multi-Sensor Dome Network Camera

12MP · 180° Panoramic View · IP66 · IK10 ·  
-50°C ~ 50°C

The VIVOTEK MS8392-EV is designed with multiple sensors to provide higher resolution, maximize the field of view and reduce the total number of cameras needed for surveillance, helping to reduce total installation time and costs. Featuring 4 x 3MP CMOS Sensors, the MS8392-EV network camera can monitor full 180° horizontal views and deliver high-quality comprehensive video coverage, making it an ideal outdoor surveillance solution. The MS8392-EV has a video alignment feature that allows you to adjust the positioning and image

quality of each sensor. This enables you to record a seamless 180° image without distortion. In addition, the MS8392-EV is armed with a robust IP66 and IK10-rated housing to enable the multi-sensor camera to withstand rain and dust as well as to protect against vandalism or tampering. It also has an included sunshield, for when wall mounted.

### Key Features

- 12-Megapixel Resolution
- 180° Panoramic View
- 7 fps @ 7552x1416
- Video Alignment Allowing You to Have a Seamless Picture
- Smart Stream to Optimize Bandwidth Efficiency
- Weather-proof IP66-rated and Vandal-proof IK10-rated Housing
- -50°C ~ 50°C Wide Temperature Range for Extreme Weather Conditions



MS8392-EV Image


## Technical Specifications

Model	MS8392-EV	<b>Network</b>	
<b>System Information</b>		Users	Live viewing for up to 10 clients
CPU	Multimedia SoC (System-on-Chip)	Protocols	IPv4, IPv6, TCP/IP, HTTP, HTTPS, UPnP, RTSP/RTP/RTCP, IGMP, SMTP, FTP, DHCP, NTP, DNS, DDNS, PPPoE, CoS, QoS, SNMP, 802.1X, NTCIP, ARP, SSL, TLS
Flash	128MB	Interface	10 Base-T/100 BaseTX Ethernet (RJ-45) *It is highly recommended to use standard CAT5e & CAT6 cables which are compliant with the 3P/ETL standard.
RAM	1GB	ONVIF	Supported, specification available at <a href="http://www.onvif.org">www.onvif.org</a>
<b>Camera Features</b>		<b>Intelligent Video</b>	
Image Sensor	1/2.8" Progressive CMOS	Video Motion Detection	Five-window video motion detection
Maximum Resolution	7552x1416	<b>Alarm and Event</b>	
Lens Type	Fixed-focal	Alarm Triggers	Motion detection, manual trigger, digital input, periodical trigger, system boot, recording notification, camera tampering detection, audio detection
Focal Length	f = 6 mm	Alarm Events	Event notification using HTTP, SMTP, FTP and NAS server, SD Card File upload via HTTP, SMTP, FTP, NAS server and SD card
Aperture	F1.6	<b>General</b>	
Field of View	180° (Horizontal) 34° (Vertical)	Connectors	RJ-45 cable connector for Network/PoE connection Audio input*1 Audio output*1 AC 24V power input*1 Digital input*1 Digital output*1
Shutter Time	1/5 sec. to 1/32000 sec.	LED Indicator	System power and status indicator
WDR Technology	WDR Enhanced	Power Input	AC 24V IEEE 802.3at PoE Class 4
Day/Night	Removable IR-cut filter for day & night function	Power Consumption	AC 24V: Max. 41.5W/8.5W (Heater on/off) IEEE 802.3at PoE: Max. 23.5W/8.5W (Heater on/off)
Minimum Illumination	0.23 Lux @ F1.6 (Color) < 0.01 Lux @ F1.6 (B/W)	Dimensions	155mm x 137mm (w/o sunshield) 155mm x 148mm (w/sunshield)
Tilt Range	15° ~ 90°	Weight	1242.2 g
Pan/Tilt/Zoom Functionalities	ePTZ: 48x digital zoom (4x on IE plug-in, 12x built in)	Casing	Weather-proof IP66-rated and vandal-proof IK10-rated housing
On-board Storage	Slot type: Micro SD/SDHC/SDXC card slot Seamless Recording	Safety Certifications	CE, LVD, FCC Class A, VCCI, C-Tick, UL
<b>Video</b>		Operating Temperature	AC 24V: Starting Temperature: -40°C ~ 50°C (-40°F ~ 122°F) Working Temperature: -50°C ~ 50°C (-58°F ~ 122°F) PoE: Starting Temperature: -20°C ~ 50°C (-4°F ~ 122°F) Working Temperature: -20°C ~ 50°C (-4°F ~ 122°F)
Compression	H.264 & MJPEG	Humidity	90%
Maximum Frame Rate	7 fps @ 7552x1416		
Maximum Streams	4 simultaneous streams		
S/N Ratio	63dB		
Dynamic Range	60dB		
Video Streaming	Adjustable resolution, quality and bitrate, Configurable video cropping for bandwidth saving Smart Stream		
Image Settings	Time stamp, text overlay, flip & mirror, scheduled profile settings, configurable brightness/contrast/saturation/sharpness, white balance, exposure control, gain, backlight compensation, privacy masks		
<b>Audio</b>			
Compression	G.711, G.726		
Interface	External microphone input External line output		

## Technical Specifications

Warranty	36 months
<b>System Requirements</b>	
Operating System	Microsoft Windows 8/7/Vista/XP/2000
Web Browser	Mozilla Firefox 7~43 (Streaming only) Internet Explorer 7/8/9/10/11
Other Players	VLC: 1.1.11 or above Quicktime: 7 or above
<b>Included Accessories</b>	
CD	User's manual, quick installation guide, Installation Wizard 2, VAST
Others	Quick installation guide, warranty card, desiccant bag, alignment sticker, wall mount kit, screws

## Dimensions

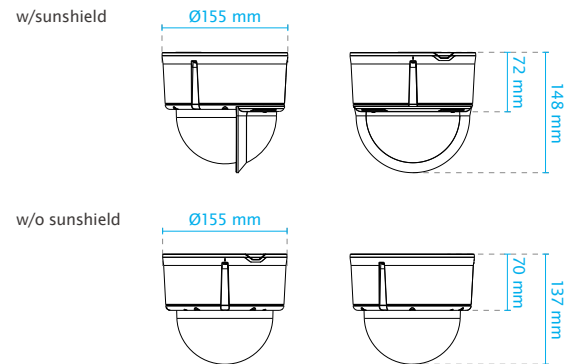

## Compatible Accessories

### Mounting Kits



AM-21A  
L Shape Bracket



AM-51C (v01)  
Adapter Ring  
(For Electrical Box)



AM-713  
Conduit Box



AM-525 (v01)  
Mounting Adapter



AM-114  
Pendant Head



AM-116/117  
Pendant Pipe  
(20 cm/40 cm)



AM-218  
Wall Mount Bracket



AM-312  
Pole Mount Adaptor



AM-412  
Corner Mount Adaptor